

SPECIFICATIONS

SUBSEA CAMERA LUMIN



Description

The Subsea Ethernet Camera is a standalone unit for capturing video and streaming it through Ethernet.

Intuitive web-based user interface for configuration via web browser.

Web-interface is accessed by entering the IP address directly into the web browser.

Multi-cast video stream is available for simultaneously streaming to several monitors/destinations.

Features

- Compact design
- Encoding latency ~80ms
- Web browser configuration interface
- Titanium housing
- Adjustable bandwidth and resolution
- Output Stream: H264
- Streams via: Unicast or Multicast
- 4000m depth rating
- Open API for external control
- Integrated Dimmable LED Light
- Sapphire Viewport

SPECIFICATIONS

SUBSEA CAMERA LUMIN

General Technical Specifications

Type		Subsea Camera Lumin
Dimensions w/connector	mm	187x51
Weight in air	g	~930
Weights in water	g	~630
Temperature Operational (ambient)	°C	0 to +40
Temperature Storage	°C	-30 to +70

Electrical

Supply Voltage	VDC	24 (10-30)
Power Consumption LED Off	W	~4
Power Consumption LED Fully On	W	~10

Performance

Benchmark Latency	ms	~80 (from captured picture to presented on monitor)
Depth Rating	m	4000
Horizontal Field of View	°	~60 (in water)
Resolution		720P/1080P
Bitrate	Mbps	0.6 - 40
Video Compression		h264A
Dynamic Range	dB	86
Sensor type		IMX322
Sensor size	Inch	1/2.9
Minimum illumination	Lux	0.01

Integrated Lighting

Max. Light output	Lumen	~700
-------------------	-------	------

Communication



Ethernet	Mbps	10/100
Default IP		10.13.37.243

Ordering Part Numbers

Description	Part Number
Subsea Camera Lumin	117188

SPECIFICATIONS

SUBSEA CAMERA LUMIN

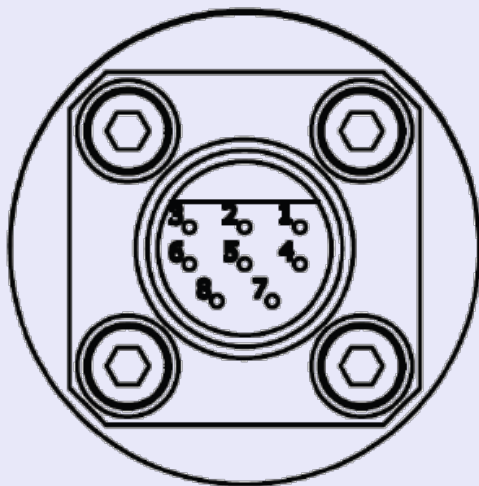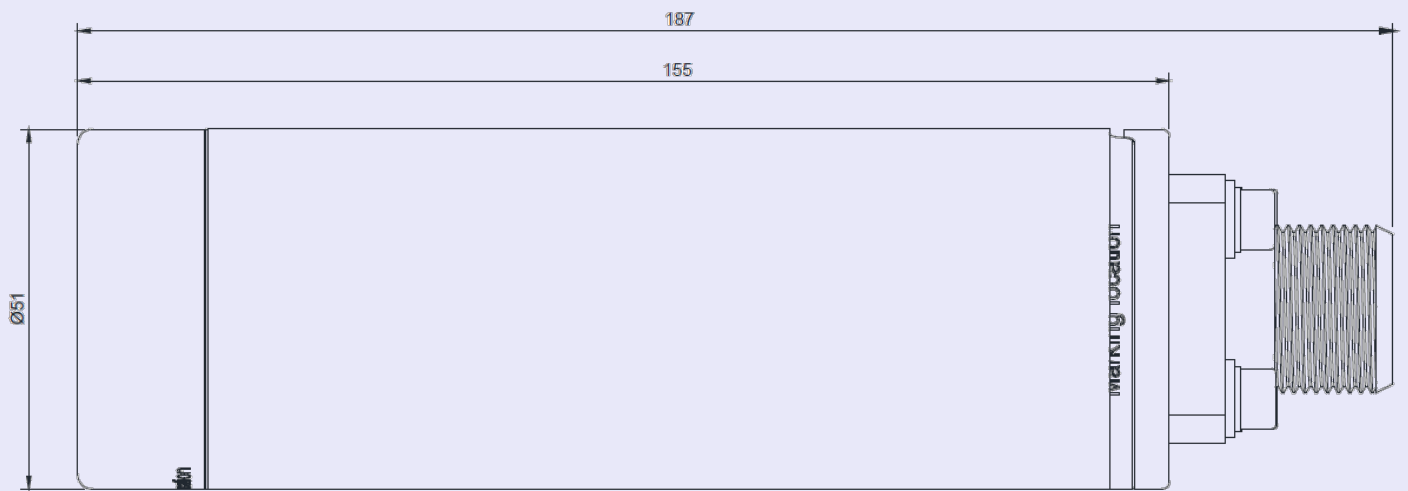

Glenair 5506-1508 Connector Pinout

1:	0V	—————
2:	24VDC	—————
3:	NC	
4:	NC	
5:	Eth Tx+	———X———
6:	Eth Tx-	———X———
7:	Eth Rx+	———X———
8:	Eth Rx-	———X———

